



[SPECIFICATION]

1. OPERATING VOLTAGE : DC 10V ~ 32V
2. WATTAGE : 150W
3. LED : 5W (XPG3) X 30EA
4. LENS : Refer to Table
5. VIBRATION : 21.2 (Grms)
6. WATER PROOF & DUST RESISTANCE
7. TEMPERATURE : -40 °C ~ 80°C
8. LIFE : 50,000 (Hr)
9. IP RATING : IP68/69K

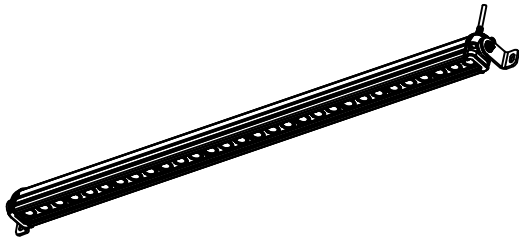

ISO-VIEW

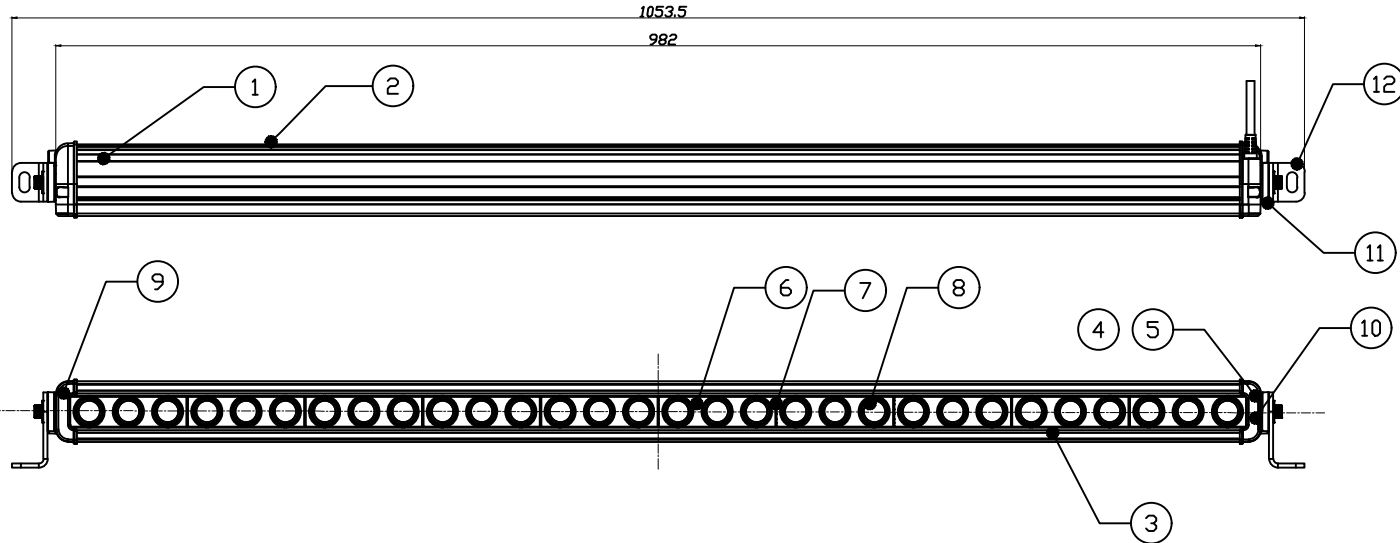

PART NAME	DESCRIPTION	Q'TY	
1	BODY	ALUMINUM(AD BLACK COATING)	1
2	BODY TOP COVER	ALUMINUM(AD BLACK COATING)	2
3	INSERT BAR	PC GLASS FIBER 10%(AD BLACK COATING)	2
4	DECO	PC(AD BLACK COATING)	2
5	SIDE TOP COVER	PC GF30% (AD BLACK COATING)	2
6	PC-COVER	PC(CLEAR)	1
7	REFLECTOR	PC(Vacuum Evaporation Coating)	10
8	LENS	ACRYL	30
9	SIDE COVER-L	ALUMINUM(ADBK COATING) LP WILD	1
10	SIDE COVER-R	ALUMINUM(ADBK COATING) LP WILD	1
11	SIDE GEAR	LP WILD GEAR / / ADBK	2
12	SUS L BRACKET	SUS 304 BARCKET	2
13	BOLT	ALLEN/SUS304/M4X13(SAMS)/NYLOK	6
14	BOLT	ALLEN/SUS304/M6X20(SAMS)/NYLOK	2
15	CONNECTOR ASS'Y	LOWPROFILE IMTRA 2P 2# LOOSE WIRE, AWG18*2C 6FT(1820mm)	1

MODEL	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	Luminous Flux (lm)
IL-XIL-LPX3060.SUS	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	60°	10,025	
IL-XIL-LPX3025.SUS	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	10,044	
IL-XIL-LPX30M.SUS	60°	60°	60°	60°	60°	60°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	60°	60°	60°	60°	60°	60°	9,839	

\*NOTE.

1. Casted parts Tolerance per ISO8062-CT8
2. Machined parts Tolerance per ISO2768-1/m
3. Dirt, stain, corrosion, scratch, or foreign per VXICS-002
4. Cutting or blanking burrs per VXICS-003
5. Surface treatment per VXICS-004

REV.	ZONE	REVISION RECORD
ANGLE		
UNIT	mm	SCALE 1:1
SHEET	1/1	REV FO
Qty	1	SIZE AO
DESIGN :	C.W.S	DATE 19.02.27
CHECKED :	C.W.S	DATE 19.02.27
APPROVAL :	J.S.M	DATE 19.02.27
WEIGHT :	- g	
FINISH :	-	
MATERIAL :	-	
CODE NO. :	MILLPX30XXSUSADBK	
PART NAME :	SPEC(30LED)	
MODEL NAME :	IL-XIL-LPX30XX.SUS	

본 자료를 영수 함으로써 모든 권한은 귀사에 인가 되었습니다. 비밀로 취급해야 하며 위반시 처벌과 손해의 지를 책임이 있습니다.

VXQF 405-4(Rev.1)