

Apollo - Neon Flex 5x8 mm



Silicone Extruded: This product is integrally extruded from food-grade pure silicone. UV resistant, anti-aging, IP67 waterproof, durable for long-term outdoor use. Safe silicone material will not be self-ignited even burned with fire.

Bending Direction: When its luminous surface is facing up or down, the bending direction is horizontal.

55 mm Cut Marks: It can be cut every 50 mm (1.97 inch) with clear cut marks on its side position.

Power Supply: Max 10 mt/33ft powered from one end.

Dimmable: The flex can be dimmed by Triac, 1-10V, DA DMX system. Please use appropriate 24VDC constant voltage drivers and controllers for dimming.


Warranty: 2 Years.

Colors Available

Warm White: 2700K, 3000K	Neutral White: 4000K, 5000K	Cool White: 6000K, 6500K *	● ● ● Single color *
---------------------------------	------------------------------------	-----------------------------------	--

Technical Specifications

Led Number / Meter	120pcs SMD2835
Power / Meter	6W/Mt (1.83 W/Ft)
Lumen Flux@ 3000K	300 ~ 350Lm / meter
CRI	>85+
SDCM	<3
Input Voltage	24V DC
Cut Length	50 mm, 1.97ft
Dimension	5x8 mm
Available Length	10mt/33ft, 5mt/16ft. 1mt/3ft
Top Shape	Flat
View Angle	180 Deg
Bending Radius	100 mm
Weights/Meter	60g
Lifespan	50,000hrs
IP Rate	IP67
Storage Temp.	-40°C ~ +70°C
Top Shape	-25°C ~ +50°C

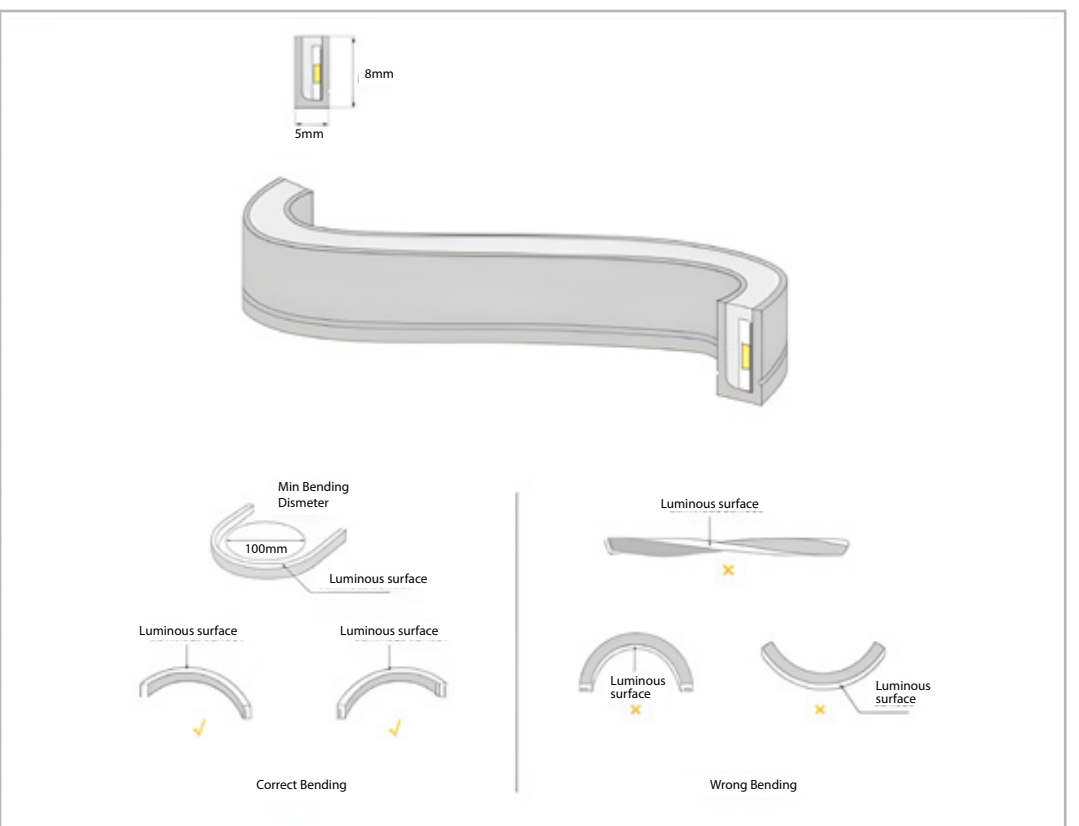

Accessories

End cap	Caps-end-5x8
Wire cap with holes	Caps-wire-5x8
Side lead-out	Caps-wire-5x8
Aluminum clip 3cm	NF0508CL
1M Aluminum Track	NF0508AT
5M Bendable stainless steel track	NF0508SS

Product Codes And SKUs

2700K; NF0508-10M24V27K (10mt) NF0508-05M24V27K (5mt) 01M24V27K (1mt)
3000K; NF0508-10M24V30K (10mt) NF0508-05M24V30K (5mt) 01M24V30K (1mt)
4000K; NF0508-10M24V40K (10mt) NF0508-05M24V40K (5mt) 01M24V40K (1mt)
5000K; NF0508-10M24V50K (10mt) NF0508-05M24V50K (5mt) 01M24V50K (1mt)



*Special Order