

Apollo - Neon Flex 06×12mm - RGB



Silicone Extruded: This product is integrally extruded from foodgrade pure silicone. UV resistant, anti-aging, IP67 waterproof, durable for long-term outdoor use. Safer silicone material will not be self-ignited even burned with fire.

Bending Direction: When its luminous surface is facing up or down, the bending direction is horizontal.

55 mm Cut Marks: It can be cut every 50mm (1.97inch) cut marks on its side position.

Power Supply: Max 10mt/33ft powered from one end.

Dimmable: The neon flex can be dimmed by Triac, 1-10V, DALI or DMX system. Please use appropriate 24VDC constant voltage drivers and controllers for dimming.



Warranty: 2 Years.

Colors Available



Technical Specifications

Led Number / Meter	120pcs SMD2835
Power / Meter	12W RGB
Lumen Flux@ 3000K	600 ~ 700Lm / meter
CRI	>85+
SDCM	<3
Input Voltage	24V DC
Cut Length	41.66 mm
Dimension	6×12 mm
Available Length	10 Meters, 30feet powered one end
Top Shape	Flat
View Angle	180 Deg
Bending Radius	100 mm
Weights/Meter	100 g
Lifespan	50,000hrs
IP Rate	IP67
Storage Temp.	-40°C ~ +70°C
Top Shape	-25°C ~ +50°C

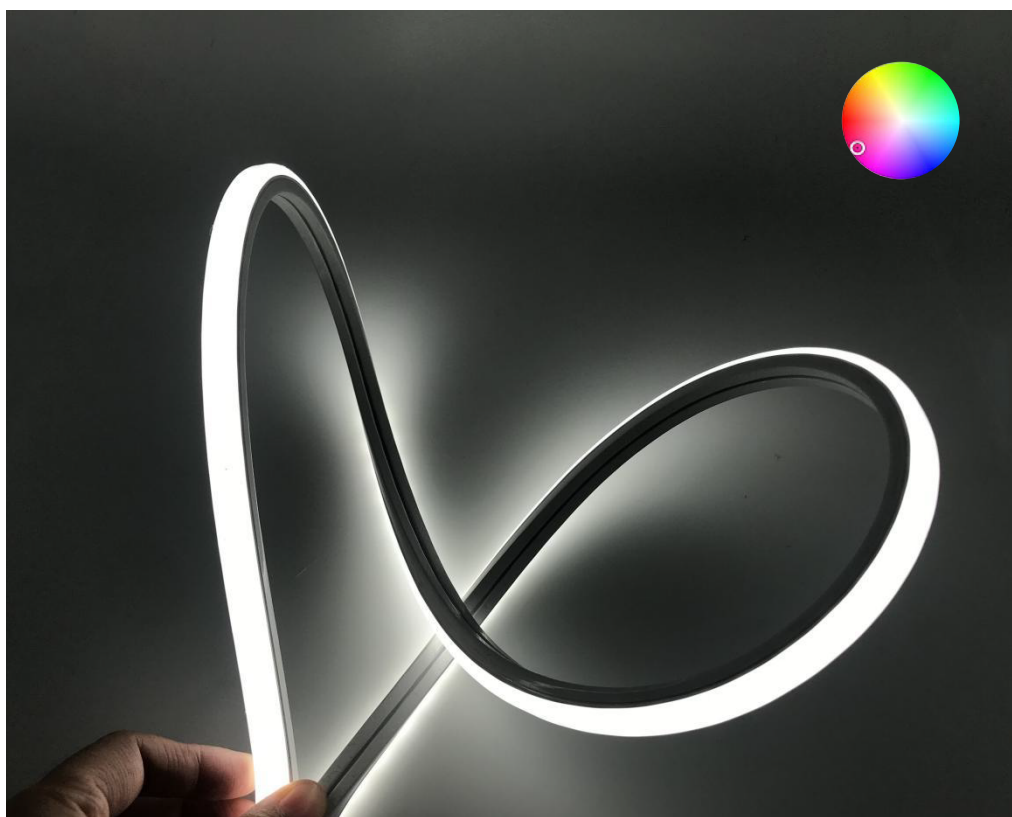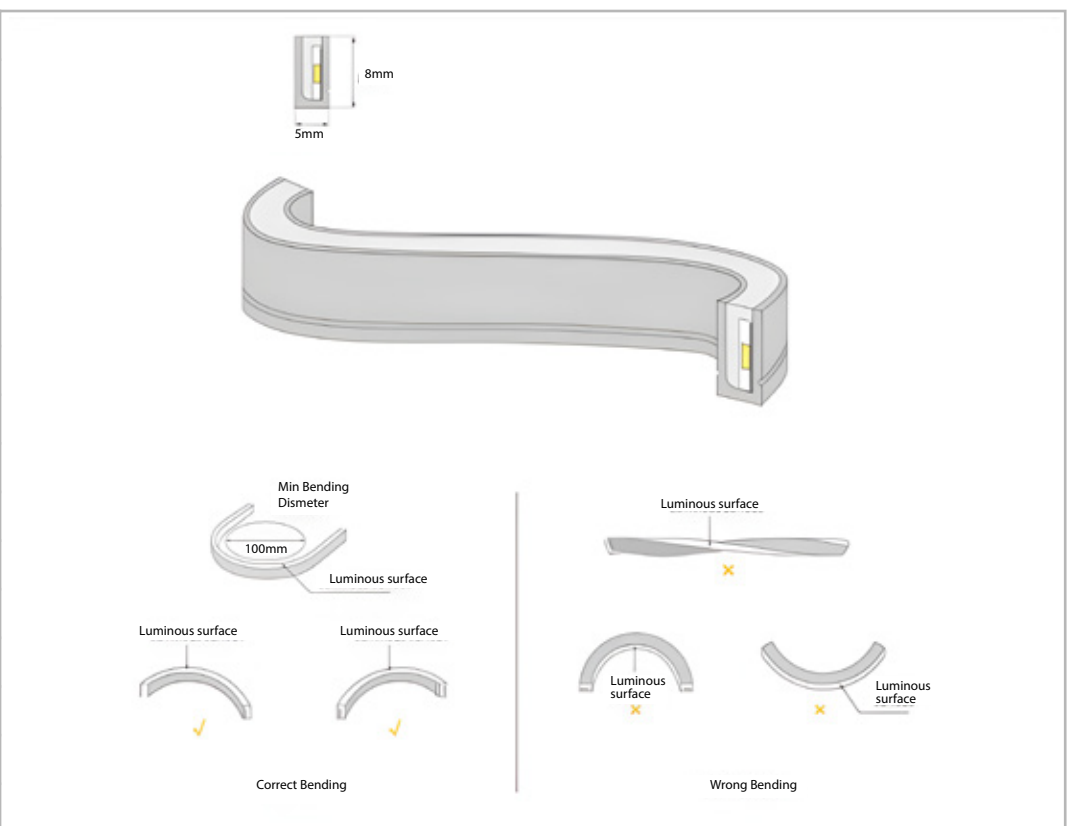

Accessories

Aluminum Tracks 1MT	NF0612-AT-F1
Aluminum Tracks 2MT	NF0612-AT-F2
Bendable SS Tracks, 5 MT	NF0612-SS
Aluminum Clips 30CM	NF0612-CL
End Caps	Caps-End-6×12
End Caps w/wires	Caps-Wire-6×12

Product Codes

NF0612-10M24VRGB-F,UL(10m)
NF0612-05M24VRGB-F,UL(5m)

